


IT Contractor & Consultant | Parking System

Jalan Tanin 3A Banjararum Singosari,Malang East Java 65153, Indonesia Phone/Fax. 0341-413760,

Email: sales@naratech.co.id - Website: www.jualpalangparkir.co.id

BARRIER GATE MX-100 PARKIR ADVERSTING BARRIER GATE

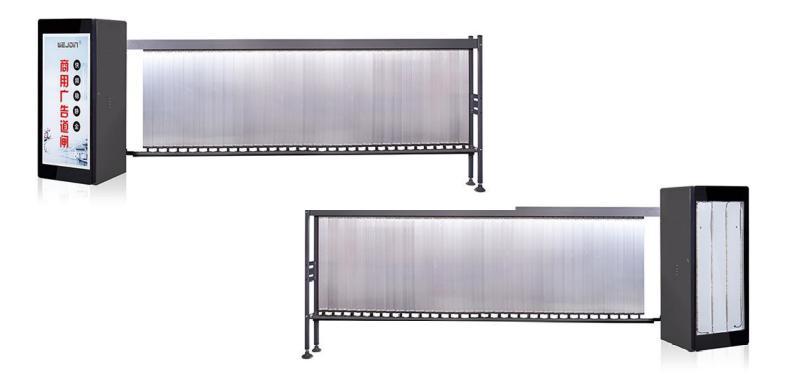

Product introduction

Advertising Parking Security Barrier Gate has combination of practical function and commercial use.

Widely used in high-class residential, office buildings, hotel, shopping mall and so on. Advertising board turning while rising, show the power of technology, and present nice advertisement. Parking advertising barrier is new fashion media which can provides higher profits for you.

Main Features

1. Rubber is installed in arm bottom. Can decrease damage if any accident happens. Auto open function (pressure sensor): The arm will be lifted if the arm meets any obstacles during closing barrier.



IT Contractor & Consultant | Parking System

Jalan Tanin 3A Banjararum Singosari,Malang East Java 65153, Indonesia Phone/Fax. 0341-413760,

Email: sales@naratech.co.id - Website: www.jualpalangparkir.co.id

- 2. The multiple protection measures (wind protection, motor thermal protection, anti-surge protection, anti-lightning protection, etc.), so that the operation of the barrier safety and reliability has been greatly improved.
- 3. Easy to integrate with other systems
- 4. Because the barrier arm is heavy, Therefore, we reinforced on the pole 1.5M long iron plate, double support + suction cup design. To ensure that in the windy weather, the arm drop is more stable.
- 5. Advertising light box and barrier boom with LED lights, increase the safety and beauty of driving at night. And can set the timing control lighting time for energy saving.
- 6. Wind resistance design

Advertising Barrier can be equipped with a special wind sensor, in the windy weather, the leaves of board will open automatically, in order to avoid damage the barrier. wind-force less than 8 level, The Ad board will not flip

Product parameters

Working temperature	-30°C~+80°C	Humidity	≤90%
Voltage	AC 220V+10%,50HZ	Dimension	330*460*1200mm
Motor power	140W/200W	Operation time	4s
Remote control distance	≤30m	Boom center height	1050mm
Color	Agate black	Electric machinery	Inverter motor
Boom length	3,4m	Communication Interface	RS485 electrical standards
LED lights power	12V,200W,16.7A	Advertisement Plate Dimension	850*450mm



IT Contractor & Consultant | Parking System

Jalan Tanin 3A Banjararum Singosari, Malang East Java 65153, Indonesia Phone/Fax. 0341-413760,

Email: sales@naratech.co.id - Website: www.jualpalangparkir.co.id



QUALITY, INTELLIGENCE, GRAND

We are a strong security system manufacturer in China with product quality assurance. international Adopting the. standard production line, grasping the fineness of each detail, the superb craftsmanship creates the reputation of high-quality and high-priced gates, and carefully studies every detail including keyhole, the details determine success or failure.

WATERPROOF, DURABLE

The overall design is independent mold opening, the company's technology has been designed through tested and researched many

1.5mm cold-rolled plate, the box is treated by pickling, phosphating, electrostatic spraying polyester powder, etc. And it has been subjected to high-temperature hot-melt baking, scrubbing and anti-UV quality, ensuring no fading for more than three years.



REMOTE CONTROLLER



SIGNAL RECEIVERY



ALLOY SPRING STEEL